



DRULIFT 8x25I

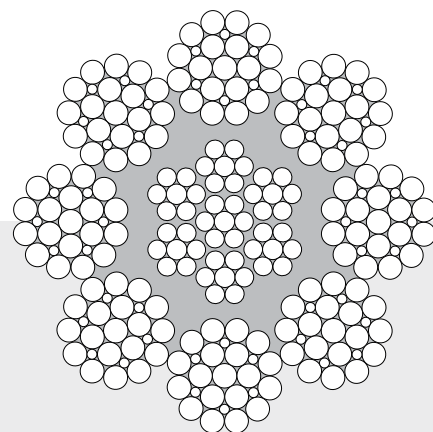

RCN

No swivel //
Bez krętklikaLubricated //
SmarowanaTolerance //
Tolerancja

Średnica nominalna / Nominal diameter		Przekr. metal. / Metallic area	Waga / Weight	Minimalna siła zrywająca / Minimum breaking force												
				1370/1770 N/mm ²				1570 N/mm ²				1770 N/mm ²				
mm	inch	mm ²	kg/m	lb/ft	kN	t [metric]	lbs	t	kN	t [metric]	lbs	t	kN	t [metric]	lbs	t
12		65,8	0,586	0,39	80,5	8,2	18 097	9,0	80,5	8,2	18 097	9,0	90,7	9,2	20 390	10,2
13		77,2	0,687	0,46	94,5	9,6	21 244	10,6	94,5	9,6	21 244	10,6	106	10,8	23 830	11,9
14		89,6	0,798	0,54	110	11,2	24 729	12,4	110	11,2	24 729	12,4	124	12,6	27 876	13,9
15		103	0,916	0,62	126	12,8	28 326	14,2	126	12,8	28 326	14,2	142	14,5	31 923	16,0
16		117	1,04	0,70	143	14,6	32 148	16,1	143	14,6	32 148	16,1	161	16,4	36 194	18,1
18		148	1,32	0,89	181	18,5	40 690	20,3	181	18,5	40 690	20,3	204	20,8	45 861	22,9
19	3/4	165	1,47	0,99	202	20,6	45 411	22,7	202	20,6	45 411	22,7	227	23,1	51 032	25,5
20		183	1,63	1,10	224	22,8	50 357	25,2	224	22,8	50 357	25,2	252	25,7	56 652	28,3
22		221	1,97	1,32	271	27,6	60 923	30,5	271	27,6	60 923	30,5	305	31,1	68 567	34,3